

## S3Z SERIES INSTRUCTION MANUAL

### CONTROLS

#### OUTPUT LED

The yellow LED indicates the output status.

#### STABILITY LED (S3Z...B01/C01/C11/F01)

The green LED ON indicates that the received signal has a safety margin greater than 20% compared to the output switching value.

#### POWER ON LED (S3Z...G00)

The green LED indicates that the sensor is operating.

#### TRIMMER (S3Z...B01/C01/C11/F01/T51)

The trimmer can be used to adjust sensitivity; the operating distance increases turning the trimmer clockwise.

#### ADJUSTMENT SCREW (S3Z...M01)

This control can be used to adjust the cutoff distance (6 turns screw); the operating distance increases turning the control clockwise.

#### DARK/LIGHT TRIMMER (S3Z...B01/C01/C11/F01/M01-NN/PP)

This trimmer can be used to set LIGHT or DARK operation mode.

#### WARNING: ONLY FOR TRIMMER (S3Z...B01/C01/C11/F01/T51) MODEL.


The trimmer rotation is limited to 250° by a mechanical stop.  
Do not apply excessive torque when adjusting (max 0.05 Nm).

### INSTALLATION

The sensor can be positioned by means of the two housing's threaded holes (M3) using two screws (M3x12 or longer or M2.5 passing screw, 0.5 Nm maximum tightening torque) with washers.  
Various orientable fixing brackets to ease the sensor positioning are available (please refer to the accessories listed in the catalogue).

### CONNECTIONS


S3Z...B01/C01/C11/F01/M01/T51    S3Z...G00

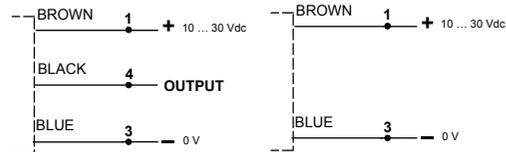

#### M8 CONNECTOR



### DIMENSIONS

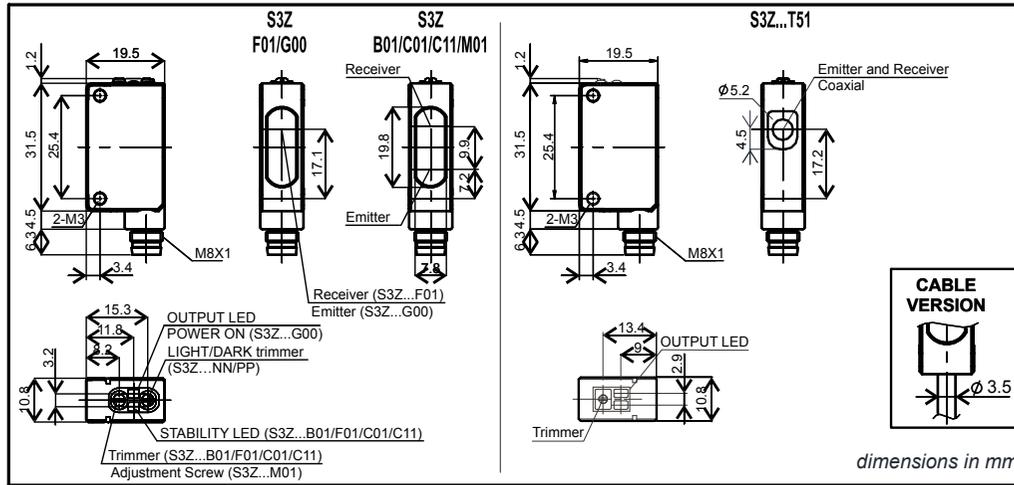

### TECHNICAL DATA

	S3Z...T51	S3Z...B01	S3Z...C01	S3Z...C11	S3Z...F01/G00	S3Z...M01
Power supply:	12 ... 24 VDC (operating limit 10...30VDC); reverse polarity protected					
Ripple:	p-p 10% max.					
Current consumption (output current excluded):	30 mA max.					
Output:	PNP or NPN (short circuit protection)					
Output current:	100 mA max.					
Output saturation voltage:	2 V max.					
Response time:	500 us max	1 ms max.				
Switching frequency:	1 KHz max.	500 Hz max.				
LIGHT/DARK selection:	DARK		L/D trimmer selection LIGHT or DARK			
Indicators:	OUT LED (YELLOW) STABILITY LED (GREEN) mod. B01/C01/C11/F01 POWER ON LED (GREEN) mod. G00					
Setting:	TRIMMER (250°)					6 turns screw
Operating temperature:	-25 ... +50 °C		-25 ... +55 °C			
Storage temperature:	-40 ... +70 °C					
Operating distance (minimum):	2 m on R2 reflector	see tab.1	50...150 mm	0...70 cm	0...20 m	50...250 mm
Difference on White 90% / Gray 18%	---					
Emission type:	RED (650 nm)	RED (665 nm)	INFRARED (850 nm)	INFRARED (870 nm)	RED (670 nm)	
Ambient light rejection:	according to EN 60947-5-2					
Vibration:	0.5 mm amplitude, 10 ... 55 Hz frequency, for every axis (EN60068-2-6)					
Shock resistance:	11 ms (30 G) 6 shock for every axis (EN60068-2-27)					
Housing:	Body PC and PBT / indicators cover PC					
Lenses:	PMMA	PC	PMMA			
Protection class:	IP67					
Connections:	2 m cable Ø 3.5 mm / M8-4 pole connector					
Weight:	50 g. max. cable versions / 10 g. connector versions					

### SETTING

#### Alignment S3Z...B01/T51

Position the sensor and reflector on opposite sides.

Turn the sensitivity trimmer to maximum. Find the points where the yellow LED (OUT) is switched ON and OFF in both vertical and horizontal positions, and fix the sensor in the centre between these points.

For B01: Optimum operation is obtained when the green LED is ON.

For T51: If necessary, reduce sensitivity using the trimmer, in order to detect very small or transparent targets. In order to improve alignment, repeat the procedure detailed above whilst progressively reducing the sensitivity.

#### Alignment S3Z...F01/G00

Position the sensors on opposite sides.

Find the points where the yellow LED (OUT) is switched ON and OFF in both vertical and horizontal positions, and fix the sensor in the centre between these points.

Optimum operation is obtained when the green LED is ON.

#### Alignment S3Z...C01/C11 (LIGHT mode)

Position the sensor and turn the sensitivity trimmer at minimum: the green LED is ON and the yellow LED is OFF.

Place the target opposite the sensor.

Turn the sensitivity trimmer clockwise until the yellow LED turns ON (Target detected state, pos.A).

Remove the target, the yellow LED turns OFF. Turn the trimmer clockwise until the yellow LED turns ON (Background detected state, pos.B). The trimmer reaches maximum if the background is not detected. Turn the trimmer to the intermediate position C, between the two positions A and B. The green LED must be ON.



#### Alignment S3Z...M01

Position the sensor and turn the adjustment screw to maximum.

Place the target opposite the sensor at a slightly greater distance than desired. Turn the screw counterclockwise until the sensor switches.

Verify the adjustment moving the target closer and further the sensor; tune the adjustment if necessary.

TAB.1: S3Z...B01 max. operating distance table (meters)

-B01	AVAILABLE REFLECTORS					
	R1	R2	R3	R4	R5	R6
	3	5	4.5	6	6	7

The sensors are NOT safety devices, and so MUST NOT be used in the safety control of the machines where installed.

#### Datalogic S.r.l.

Via S. Vitalino 13 - 40012 Calderara di Reno - Italy  
Tel: +39 051 3147011 - Fax: +39 051 3147205 - www.datalogic.com

Helpful links at www.datalogic.com: **Contact Us, Terms and Conditions, Support.**

The warranty period for this product is 36 months. See General Terms and Conditions of Sales for further details.

Under current Italian and European laws, Datalogic is not obliged to take care of product disposal at the end of its life. Datalogic recommends disposing of the product in compliance with local laws or contacting authorised waste collection centres.

© 2017 Datalogic S.p.A. and/or its affiliates • ALL RIGHTS RESERVED. • Without limiting the rights under copyright, no part of this documentation may be reproduced, stored in or introduced into a retrieval system, or transmitted in any form or by any means, for any purpose, without the express written permission of Datalogic S.p.A. and/or its affiliates. Datalogic and the Datalogic logo are registered trademarks of Datalogic S.p.A. in many countries, including the U.S.A. and the E.U. All other trademarks and brands are property of their respective owners. Datalogic reserves the right to make modifications and improvements without prior notification.